


Standing Seam Roofing Systems

780.451.5482
www.lenmak.com
Toll Free 888.451.5482

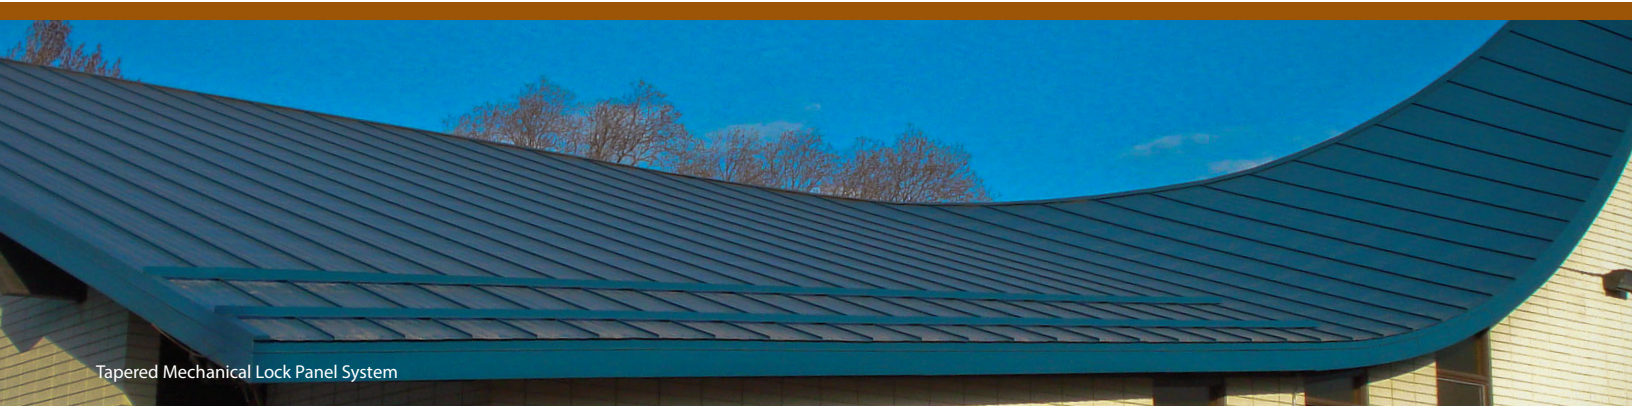

Standing Seam Roofing Systems offer optimal performance & exceptional value for new construction & renovation projects. Systems offer aesthetic & functional benefits for residential, commercial, & industrial applications. Components are manufactured locally in a wide range of standard & premium finishes as well as exotic natural metals.

Advantages

Design

- Several panel widths and rib heights offer a solution for all slopes and roof sizes
- Trim is perfectly matched and pre-programmed; custom trim details also available at no additional cost

Materials

- 35 Standard (SMP) Colours
- 22 Premium (Kynar) Colours
- 9 NaturClad™ (Kynar) Colours
- 22ga, 24ga, and 26ga thicknesses available
- Natural metals also available by special order (aluminum with or without corrosion barrier, copper, zinc)
- Trim is prefinished for a perfect match

Time

- Lean manufacturing and in-house light-gauge coil slitting enables custom orders to be completed days or weeks faster than competitive products
- Custom widths available without extended lead time
- Shorter lead times reduce project cost/risk
- Panels are produced to exact length to reduce on-site modifications and improve install time

Price

- High quality substrates and finishes improve life-span of roofing materials for better value over time
- Profiles are optimized for zero waste in manufacturing so a client never pays for material not used
- Fully customizable trim allows installers to reduce or eliminate need for on-site fabrication of trim components
- Panels are produced to exact length, further reducing waste generated on-site

Sustainability

- Steel panels are produced from substrate containing a minimum of 6.8% pre-consumer & 24% post-consumer recycled materials
- Site-generated waste is 100% recyclable





Curved Mechanical Lock Panel System

Long Length & Long Lasting.

Standing Seam Roofing Systems are a great way to improve the service life of any commercial or residential sloped roof:

- Prefinished steel in a wide variety of finishes will never warp, crack, peel, or delaminate
- Eco-responsible steel contains pre- & post-consumer recycled content, contributing towards LEED NC-v2.2 MRc4: Recycled Content
- Metal panels and accessories are non-combustible & pest-resistant, contributing to lower insurance costs

Mechanical Lock Panel System

- Ideal for low-slope, full-deck, roof-hugger assemblies, or open purlin applications
- Mechanically seamed ribs offer best defence against driving rain & wind
- Concealed fasteners & colour-matched flashing details stylishly maintain roof performance
- Can be manufactured on-site for exceptionally long runs
- Can be tapered or curved to accommodate special architectural features
- Available in natural copper & zinc

Snap Seam Panel System

- Concealed clip system allows system to expand & contract without impact to functionality or aesthetics of roof
- No seamer tool required for installation
- Can be manufactured in lighter gauges & installed over solid decking for beautiful & cost-effective applications, even on long runs up to 59'
- Choice of flat ribs or striations in panel body to promote flatness
- Available colour-matched trim customized for all rib heights

Nail Strip Snap Lock Panel System

- Ideal for steeper slope & shorter run applications with full decking
- No clips or seamer required to install; integrated nailing leg with punched holes conceals fasteners
- Easy, cost-effective installation
- Choice of flat ribs or striations in panel body to promote flatness
- Available colour-matched trim customized for all rib heights

Visit www.lenmak.com for recommended flashing details, electronic order forms, specifications, and more!

| Panel Type | Materials | Rib Height | Panel Width* | Min Length | Max Length | Min Slope | Clips & Installation Method |
|----------------------------|---|------------|-------------------|------------|------------|-----------|---|
| Mechanical Lock Panel | 22ga, 24ga, 26ga Steel SMP Painted, PVDF Painted, Galvalume Natural Copper | 1" | 13.25" / 21.25" | 24" (2') | 708" (59') | 3 / 12 | 2-Part Clips Seamer required for single or double lock Compatible with S-5 Solar Panel installation clips |
| | | 1.5" | 12.25" / 20.25" | 24" (2') | 708" (59') | 1.5 / 12 | |
| | | 2" | 11" / 19" | 24" (2') | 708" (59') | 0.75 / 12 | |
| Snap Seam Panel | 22ga, 24ga, 26ga Steel SMP Painted, PVDF Painted, Galvalume | 1" | 12.875" / 20.875" | 24" (2') | 708" (59') | 3 / 12 | 1-Part Clips No seamer required for installation |
| | | 1.5" | 11.375" / 19.375" | 24" (2') | 708" (59') | 1.5 / 12 | |
| Nail Strip Snap Lock Panel | 22ga, 24ga, 26ga Steel SMP Painted, PVDF Painted, Galvalume | 1" | 11.75" / 19.75" | 36" (3') | 300" (25') | 3 / 12 | No Clips - Integrated fastening fin with holes No seamer required for installation |
| | | 1.5" | 10.875" / 18.875" | 36" (3') | 300" (25') | 1.5 / 12 | |

*Recommended panel widths may vary by selected material and availability at time of order. Custom widths available; please inquire for pricing.